


Cosmetic mirrors

17612019000 Cosmetic mirror

PRODUCT



DRAWING

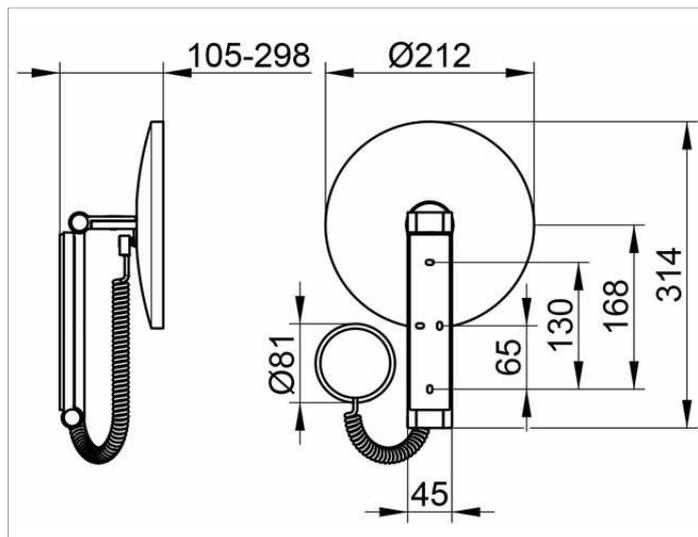

PRODUCT ATTRIBUTES

illuminated, 5-stage adjustable light colour from 2700 kelvin (warm white) to 6500 kelvin (daylight)
 glass control panel, spiral cord (block length 400 mm)
 on pivoted rail adjustable in three dimensions
 one-sided mirror, magnification factor x 5

Operation:

Glass control panel with capacitive touch sensor and LED display

Power supply:

Mains connection via wall socket,
 12 V in-wall adapter, input 220-240 V,
 standby consumption: < 0,5 watt

Illumination:

LED 4,5 watt (lifespan > 50.000 hours)
 lamps non-exchangeable
 EEK: A , 5 kWh/1000h

SURFACE

chrome-plated

DIMENSION

mit Sensorsteuerung

SPECIFICATIONS

KEUCO iLook_move Cosmetic mirror, 17612019000

high quality cosmetic mirror, round,
 chrome-plated, illuminated,
 on pivoted rail,
 wall-mounted surface with 4 fixing points
 for optimal load distribution,
 adjustable in three dimensions, one-sided mirror,
 magnification factor x 5,
 power supply with in-wall adapter 230 V (included)
 and a white spiral cord, 400 mm,
 Lighting: 1 x 4,5 Watt LED (maintance-free lamps),
 Standby consumption: smaller 0,5 Watt,
 high quality, easy to clean control panel
 with touch sensor technology,
 Light colours: 2700 Kelvin (warm white) – 6500 Kelvin (daylight),
 light colours can be adjusted individually,
 Height wall fixing 180 mm, width ca. 45 mm,
 max. heigt ca. 500 mm,
 outside diameters 212 mm, max. depth ca. 300 mm,
 delivery includes anti-corrosion fixings

Note:

Transformer to be housed in recessed function box (68mm)

Please go to www.keuco.de for detailed instructions and advise.