### **FRAME 25 MIRROR**

## Mirror without light element 44740.9 Light element for mirror

4**4754.1** 4**4754.2** 

4**4757.1** 


4**4757.2** 





#### TECHNICAL DATA

Order no.	44740.9 / mirror	Specification	LED light element vertical :
	44754.1, 44757.1 / light element		fixation with integrated non hinge system
	44754.2, 44757.2 / light element with switch		44757.1 – vertical, without switch
Certified to	IP44 / 44754.1, 44754.2, 44757.1, 44757.2		1x 12W, 4000 Kelvin (daylight), IP44, 230V
Dimensions (WxHxD)	1500 x 700 x 23 mm (+4 mm gap to wall) / mirror		44757.2 - vertical, with sensor switch
	1500 x 25 x 25 mm / light element horizontal		integrated in the mirror aluminium frame
	25 x 711 x 25 mm / light element vertical		1x 12W, 4000 Kelvin (daylight), IP44, 230V
Specification	Mirror without light:	Weight	44740.9 – 14,0 kg
	mirror glass 4 mm with security foil on the		44754.1, 44754.2 – 3,5 kg
	back side, integrated in aluminium frame		44757.1, 44757.2 – 1,5 kg
	electro polished	Mounting acc. incl.	Installation set for mirror, order no. 49831.5
	LED light element horizontal:	Mounting information	The fortification walls must meet the requirements
	fixation with integrated non hinge system		of the furniture in terms of weight and the supplied
	44754.1 – without switch		fasteners. This can not be guaranteed, another
	1x 30W, 4000 Kelvin (daylight), IP44, 230V		method of attachment is chosen.
	44754.2 - with sensor switch integrated in the		230V power supply required (only for mirror with
	mirror aluminium frame (bottom side)		light element).
	1x 30W, 4000 Kelvin (daylight), IP44, 230V		

#### TECHNICAL DRAWINGS / S 1 : 20

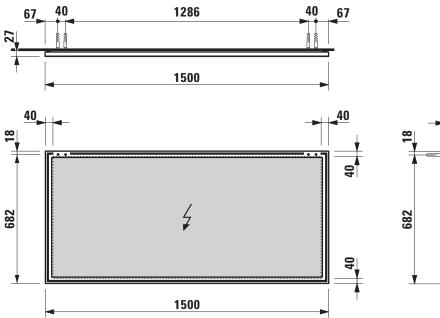





Optional: light element horizontal / vertical

# L众UFEN