
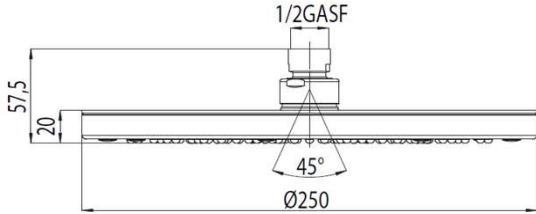
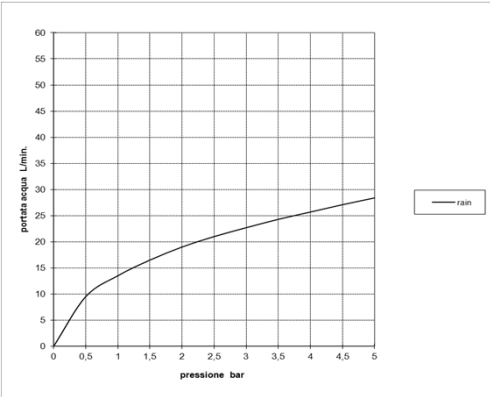


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 10/09/2015	Rev/0																								
Codice / Code: I00417		Descrizione / description: Soffione Elios autopulente con snodo 1/2" F Elios shower head with 1/2" F swivel ball – Easy-Clean																											
Foto / image		Disegni / drawings																											
																													
Grafico di portata / Flow rate diagram																													
		<table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>9,5</td></tr> <tr><td>1</td><td>13,5</td></tr> <tr><td>1,5</td><td>16,5</td></tr> <tr><td>2</td><td>19</td></tr> <tr><td>2,5</td><td>21</td></tr> <tr><td>3</td><td>22,7</td></tr> <tr><td>3,5</td><td>24,3</td></tr> <tr><td>4</td><td>25,7</td></tr> <tr><td>4,5</td><td>27,1</td></tr> <tr><td>5</td><td>28,4</td></tr> </tbody> </table>					rain	0	0	0,5	9,5	1	13,5	1,5	16,5	2	19	2,5	21	3	22,7	3,5	24,3	4	25,7	4,5	27,1	5	28,4
	rain																												
0	0																												
0,5	9,5																												
1	13,5																												
1,5	16,5																												
2	19																												
2,5	21																												
3	22,7																												
3,5	24,3																												
4	25,7																												
4,5	27,1																												
5	28,4																												
MATERIALI / materials		Stainless Steel (AISI 304), Brass, Rubber (EPDM 70 Sh.A), Plastic (ABS, POM, PVC 65 Sh.A)																											
CARATTERISTICHE IDRAULICHE / hydraulic features																													
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																									
min	1 bar	/	--	Blocco di sicurezza safety lock	/																								
max	5 bar	/	<70°C	Temperatura acqua fredda cold water temperature	/																								
consigliata recommended	2-3 bar	9 L/min	°C	Temperatura acqua calda hot water temperature	/																								
CERTIFICAZIONI / CERTIFICATIONS: ACS (France), CSA, IAPMO [ASME A112.18.1/CSA B125.1](CAN/USA);																													
CONFORMITA' / CONFORMITY: EN 1112; Chrome plating EN 248																													