
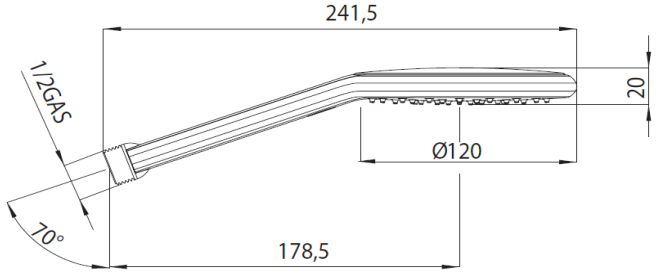
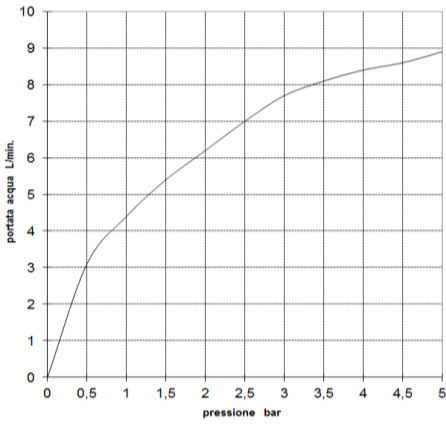
		<b>SCHEDA TECNICA</b> TECHNICAL SHEET		Date: 18/07/2017	Rev/0																								
<b>Codice / Code:</b> <b>B00172</b>		<b>Descrizione / description:</b> Doccia monogetto Ø 120 mm - con sistema Fitair Single function handshower Ø 120 mm - with Fitair system																											
<b>Foto / image</b> 		<b>Disegni / drawings</b> 																											
<b>Grafico di portata / Flow rate diagram</b>																													
<table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>3,1</td></tr> <tr><td>1</td><td>4,4</td></tr> <tr><td>1,5</td><td>5,4</td></tr> <tr><td>2</td><td>6,2</td></tr> <tr><td>2,5</td><td>7</td></tr> <tr><td>3</td><td>7,7</td></tr> <tr><td>3,5</td><td>8,1</td></tr> <tr><td>4</td><td>8,4</td></tr> <tr><td>4,5</td><td>8,6</td></tr> <tr><td>5</td><td>8,9</td></tr> </tbody> </table>			rain	0	0	0,5	3,1	1	4,4	1,5	5,4	2	6,2	2,5	7	3	7,7	3,5	8,1	4	8,4	4,5	8,6	5	8,9				
	rain																												
0	0																												
0,5	3,1																												
1	4,4																												
1,5	5,4																												
2	6,2																												
2,5	7																												
3	7,7																												
3,5	8,1																												
4	8,4																												
4,5	8,6																												
5	8,9																												
pressione <b>bar</b> portata <b>L/min</b>																													
<b>MATERIALI / materials</b> ABS, Silicone, Nbr, Acetal																													
<b>CARATTERISTICHE IDRAULICHE / hydraulic features</b>																													
	pressione pressure	portata flow rate	temperatura temperature	<i>solo per miscelatori termostatici</i> <i>only for thermostatic mixers</i>																									
min	<b>1 bar</b>	--	--	Blocco di sicurezza safety lock	/																								
max	<b>5 bar</b>	--	<b>&lt;70°C</b>	Temperatura acqua fredda cold water temperature	/																								
consigliata recommended	<b>2-3 bar</b>	--	<b>&lt;42°C</b>	Temperatura acqua calda hot water temperature	/																								
<b>CERTIFICAZIONI / CERTIFICATIONS:</b> ACS(FRA), WATERMARK [AS/NZS 3662:2005] (AUS), WELS PUB [1 thick] (SGP), CSA [ASME A112.18.1/CSA B125.1](CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																													
<b>CONFORMITA' / CONFORMITY :</b> Chrome plating - EN 248.																													