

# FRAME 25 MIRROR

## LED light element horizontal for mirror without / with sensor switch

44745.1 / 44745.2

44746.1 / 44746.2

44747.1 / 44747.2

44748.1 / 44748.2


44749.1 / 44749.2



### TECHNICAL DATA

|                    |   |                      |   |
|--------------------|---|----------------------|---|
| Order no.          | 44745.1, 44746.1, 44747.1, 44748.1,<br>44749.1 / without switch<br>44745.2, 44746.2, 44747.2, 44748.2,<br>44749.2 / with sensor switch  | Weight               | 44745.1, 44745.2 – 1,5 kg<br>44746.1, 44746.2 – 1,5 kg<br>44747.1, 44747.2 – 1,5 kg<br>44748.1, 44748.2 – 1,5 kg<br>44749.1, 44749.2 – 1,5 kg |
| Certified to       | IP44  | Mounting information | 230V power supply required  |
| Dimensions (WxHxD) | 450 x 25 x 25 mm / 44745.1, 44745.2<br>550 x 25 x 25 mm / 44746.1, 44746.2<br>600 x 25 x 25 mm / 44747.1, 44747.2<br>650 x 25 x 25 mm / 44748.1, 44748.2<br>800 x 25 x 25 mm / 44749.1, 44749.2   | Colour               | 007 – Anodised aluminum   |
| matching for       | mirror 44740.0, 44740.1, 44740.2, 44740.3,<br>44740.4<br>only in connection with frame colour option 144  |                      |   |
| Specification      | LED light element – Anodized aluminum<br>Fixation with integrated non hinge system<br>without switch<br>1x 12W, 4000 Kelvin (daylight), IP44, 230V<br>with sensor switch integrated in the mirror<br>aluminum frame (bottom side)<br>1x 12W, 4000 Kelvin (daylight), IP44, 230V |                      |   |

### TECHNICAL DRAWINGS / S 1 : 20

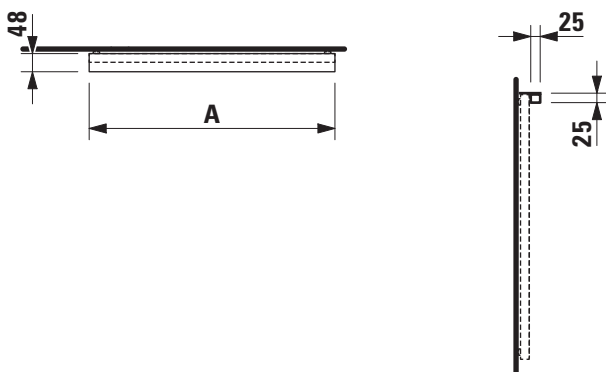

| A / mm |   |
|--------|---|
| 450    | Frame 25 light element 44745.1, 44745.2 |
| 550    | Frame 25 light element 44746.1, 44746.2 |
| 600    | Frame 25 light element 44747.1, 44747.2 |
| 650    | Frame 25 light element 44748.1, 44748.2 |
| 800    | Frame 25 light element 44749.1, 44749.2 |