
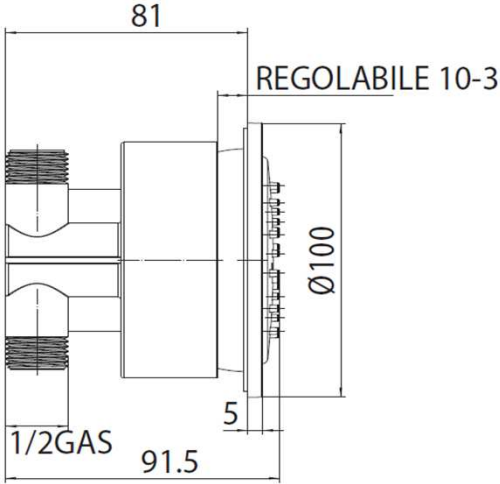
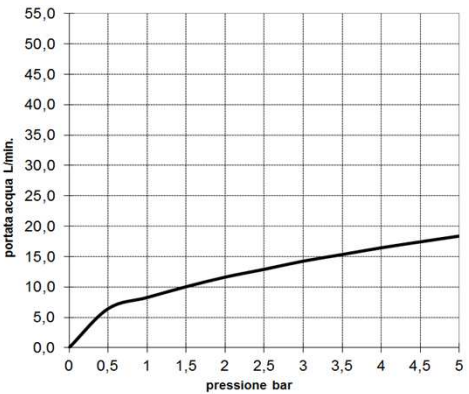
	SCHEDA TECNICA TECHNICAL SHEET		Date: 12/07/2017	Rev/0																										
Codice / Code: I00197		Descrizione / description: Soffione laterale orientabile getto pioggia autopulente in ABS. ABS body spray orientable shower, rain function.																												
Foto / image 		Disegni / drawings 																												
Grafico di portata / Flow rate diagram 		<table border="1"> <thead> <tr> <th></th> <th>RAIN</th> </tr> </thead> <tbody> <tr><td>0</td><td>0,0</td></tr> <tr><td>0,5</td><td>6,4</td></tr> <tr><td>1</td><td>8,3</td></tr> <tr><td>1,5</td><td>10,1</td></tr> <tr><td>2</td><td>11,6</td></tr> <tr><td>2,5</td><td>12,9</td></tr> <tr><td>3</td><td>14,3</td></tr> <tr><td>3,5</td><td>15,4</td></tr> <tr><td>4</td><td>16,5</td></tr> <tr><td>4,5</td><td>17,4</td></tr> <tr><td>5</td><td>18,4</td></tr> <tr> <td>Pressure bar</td> <td>Flow Rate L/min</td> </tr> </tbody> </table>				RAIN	0	0,0	0,5	6,4	1	8,3	1,5	10,1	2	11,6	2,5	12,9	3	14,3	3,5	15,4	4	16,5	4,5	17,4	5	18,4	Pressure bar	Flow Rate L/min
	RAIN																													
0	0,0																													
0,5	6,4																													
1	8,3																													
1,5	10,1																													
2	11,6																													
2,5	12,9																													
3	14,3																													
3,5	15,4																													
4	16,5																													
4,5	17,4																													
5	18,4																													
Pressure bar	Flow Rate L/min																													
MATERIALI / materials Faceplate flange, body, rose: Plastic (ABS, POM, PVC 65 Sh.A), seals: Rubber (EPDM 70 Sh.A), diffuser: Silicone; other parts: Brass;																														
CARATTERISTICHE IDRAULICHE / hydraulic features																														
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																										
min	1 bar	/	--	Blocco di sicurezza safety lock	/																									
max	5 bar	/	<70°C	Temperatura acqua fredda cold water temperature	/																									
consigliata recommended	2-3 bar	3 L/min	°C	Temperatura acqua calda hot water temperature	/																									
CERTIFICAZIONI / CERTIFICATIONS:																														
CONFORMITA' / CONFORMITY: EN1112 - Chrome plating EN 248																														