
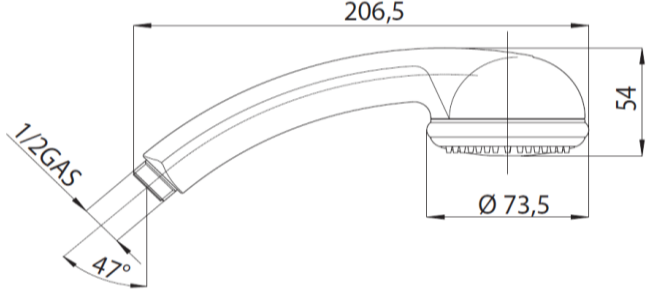
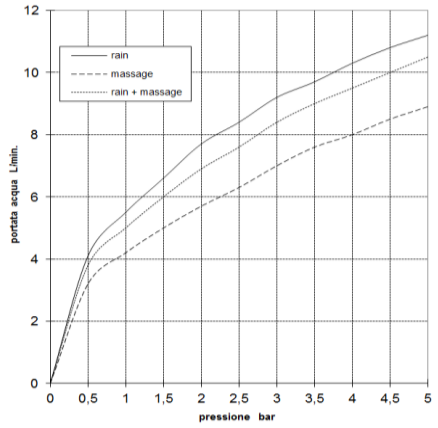


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 24/07/2017	Rev/0																																																				
Codice / Code: B00067		Descrizione / description: Doccia 3 getti - Risparmio Acqua 3 function handshower - Water saving																																																							
Foto / image		Disegni / drawings																																																							
																																																									
Grafico di portata / Flow rate diagram																																																									
<table border="1"> <thead> <tr> <th></th> <th>rain</th> <th>massage</th> <th>rain + massage</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>4,1</td><td>3,2</td><td>3,8</td></tr> <tr><td>1</td><td>5,5</td><td>4,2</td><td>5</td></tr> <tr><td>1,5</td><td>6,6</td><td>5</td><td>6</td></tr> <tr><td>2</td><td>7,7</td><td>5,7</td><td>6,9</td></tr> <tr><td>2,5</td><td>8,4</td><td>6,3</td><td>7,6</td></tr> <tr><td>3</td><td>9,2</td><td>7</td><td>8,4</td></tr> <tr><td>3,5</td><td>9,7</td><td>7,6</td><td>9</td></tr> <tr><td>4</td><td>10,3</td><td>8</td><td>9,5</td></tr> <tr><td>4,5</td><td>10,8</td><td>8,5</td><td>10</td></tr> <tr><td>5</td><td>11,2</td><td>8,9</td><td>10,5</td></tr> <tr> <td>pressione bar</td> <td colspan="3">portata L/min</td> </tr> </tbody> </table>			rain	massage	rain + massage	0	0	0	0	0,5	4,1	3,2	3,8	1	5,5	4,2	5	1,5	6,6	5	6	2	7,7	5,7	6,9	2,5	8,4	6,3	7,6	3	9,2	7	8,4	3,5	9,7	7,6	9	4	10,3	8	9,5	4,5	10,8	8,5	10	5	11,2	8,9	10,5	pressione bar	portata L/min						
	rain	massage	rain + massage																																																						
0	0	0	0																																																						
0,5	4,1	3,2	3,8																																																						
1	5,5	4,2	5																																																						
1,5	6,6	5	6																																																						
2	7,7	5,7	6,9																																																						
2,5	8,4	6,3	7,6																																																						
3	9,2	7	8,4																																																						
3,5	9,7	7,6	9																																																						
4	10,3	8	9,5																																																						
4,5	10,8	8,5	10																																																						
5	11,2	8,9	10,5																																																						
pressione bar	portata L/min																																																								
MATERIALI / materials																																																									
ABS, Silicone, Nbr, Acetal																																																									
CARATTERISTICHE IDRAULICHE / hydraulic features																																																									
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																																																					
min	1 bar	--	--	Blocco di sicurezza safety lock	/																																																				
max	5 bar	--	<70°C	Temperatura acqua fredda cold water temperature	/																																																				
consigliata recommended	2-3 bar	--	<42°C	Temperatura acqua calda hot water temperature	/																																																				
CERTIFICAZIONI / CERTIFICATIONS:																																																									
ACS(FRA), NF [EN 1112] (FRA), WATERMARK [AS/NZS 3662:2005] (AUS), WELS PUB [1 thick] (SGP), CSA [ASME A112.18.1/CSA B125.1](CAN/USA), IAPMO [ASME A112.18.1/CSA B125.1] (USA/CAN).																																																									
CONFORMITA' / CONFORMITY :																																																									
Chrome plating - EN 248.																																																									