

Поверхности : **хром** Артикульный номер: **27284000**



XXL Performance

The technical drawing consists of two parts: a front view on the left and a side view on the right.

- Front View (Left):** Shows the top-down profile of the shower head assembly. The shower head has a width of 240 mm. Below it is a diverter valve with a diameter of Ø 22 mm. Further down is another control knob with a height of 82 mm from the base. The main vertical pipe has a diameter of Ø 60 mm. At the bottom, there is a water inlet connection with a G 1/2 thread, a distance of 68 mm to the base, and a total width of 218 mm. A hose connects the diverter valve to the shower head, with a length of 86 mm and a final width of 35 mm at the shower head connection point.
- Side View (Right):** Shows the shower head tilted at an angle. The overall height from the floor to the top of the shower head is 1104 mm. The horizontal distance from the wall to the center of the shower head is 470 mm. The shower head itself has a width of 240 mm and a depth of 15 mm. The arm holding the shower head is adjustable, with a range of motion indicated by a 100° arc. The maximum reach of the arm is max. 281 mm. The distance from the wall to the start of the arm is 62 mm. The distance from the floor to the base of the arm is 43 mm. The base of the shower unit has a width of 174 mm and a height of 74 mm from the floor.


Crometta E

Crometta E 240 1jet Showerpipe с однорычажным смесителем

Поверхности : **хром** Артикульный номер: **27284000**



График расхода воды

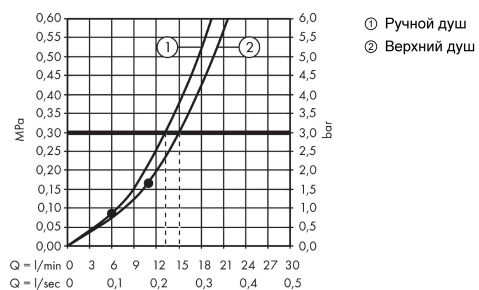

Crometta E
Crometta E 240 1jet Showerpipe с однорычажным смесителем
 Поверхности : **хром** Артикульный номер: **27284000**



Пример монтажа

