PRODUCT DATA SHEET



Cosmetic mirrors 17613019000 Cosmetic mirror

PRODUCT



PRODUCT ATTRIBUTES

illuminated, 5-stage adjustable light colour from 2700 kelvin (warm white) to 6500 kelvin (daylight) glass control panel, spiral cord (block length 400 mm) on pivoted rail adjustable in three dimensions one-sided mirror, magification factor x 5 Operation:

Glass control panel with capacitive touch sensor and LED display

Power supply:

Mains connection via wall socket, 12 V in-wall adapter, input 220-240 V, standby consumption: < 0,5 watt Illumination:

LED 7 watt (lifespan > 50.000 hours) lamps non-exchangeable EEK: A , 8 kWh/1000h


SURFACE

chrome-plated

DIMENSION

mit Sensorsteuerung

DRAWING

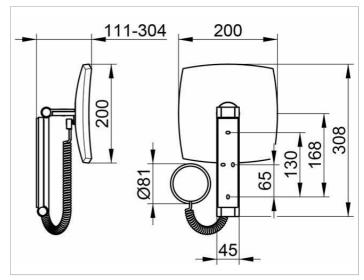

SPECIFICATIONS

KEUCO iLook_move Cosmetic mirror, 17613019000 high quality cosmetic mirror, square, chrome-plated, illuminated, on pivoted rail, wall-mounted surface with 4 fixing points for optimal load distribution, adjustable in three dimensions, one-sided mirror, magnification factor x 5, power supply with in-wall adapter 230 V (included)

and a white spiral cord, 400 mm,

Lighting: 1 x 7 Watt LED (maintance-free lamps),

Standby consumption: smaller 0,5 Watt,

high quality, easy to clean control panel

with touch sensor technology,

Light colours: 2700 Kelvin (warm white) – 6500 Kelvin (daylight),

5-stage adjustable light colour,

Height wall fixing 180 mm, width ca. 45 mm,

max. heigt ca. 500 mm,

outside diameters 200 x 200, max. depth ca. 300 mm,

delivery includes anti-corrosion fixings,

Note:

Transformer to be housed in recessed function box (68mm)

Please go to www.keuco.de for detailed instructions and advise.