



BOSSINI

HIGH QUALITY SHOWER SYSTEMS

SCHEDA TECNICA - TECHNICAL SHEET

17/01/2024

Rev: 0

Codice - Code:

INZ228

Stainless steel 4-holes deck-mounted bathtub with single lever mixer and 2-ways diverter

Descrizione - Description:

Batteria bordo vasca a 4 fori in inox con doccetta estraibile, flessibili e contrappeso

Stainless steel 4-holes deck-mounted bathtub mixer with hand shower, hoses and counterweight

Edelstahl 4-Löhcher Wannenrandarmatur mit Handbrause, Schläuchen und Gegengewicht

Tecnologia - Technology:



Mitigeur de bain sur gorge 4 trous en acier inoxydable avec douchette extractible, flexibles et contrepoids

Mezclador borde bañera 4 agujeros en acero inoxidable con mango ducha extraíble, flexibles y contrapeso

Комплект на борт ванны на 4 отверстия нержавеющей сталь, с выдвижным ручным душем, шлангами и противовесом

Immagine Prodotto - Product Image



Disegni - Drawings


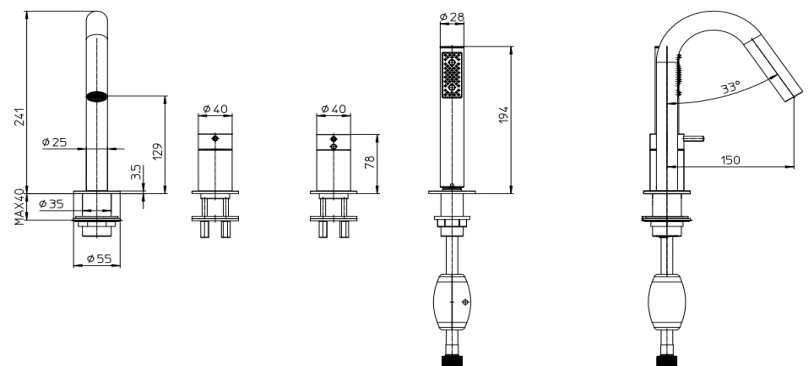


Grafico di portata - Flow rate diagram

	RIEMP. VASCA	DOCCIA
0	0,0	0,0
0,5	4,6	3,6
1	7,0	6,0
1,5	9,0	7,8
2	10,9	9,4
2,5	12,4	10,8
3	13,6	12,0
3,5	14,8	13,0
4	15,9	13,9
4,5	16,9	14,9
5	17,8	15,7

pressione bar portata L/min

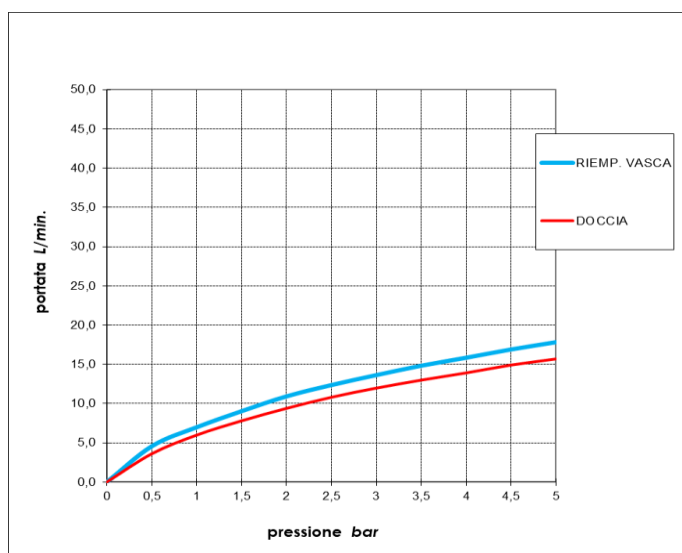

Caratteristiche idrauliche - Hydraulic features

	Pressione Pressure	Portata Flow rate	Solo per miscelatori termostatici Only for thermostatic mixers	
min	1 bar	6 L/min	Blocco di sicurezza Safety lock	38 °C
max	5 bar	17,8 L/min	Temperatura acqua fredda Cold water temperature	≤ 20 °C
Portata minima consigliata per buon funzionamento Recommended minimum flow-rate for optimal performance		--	Temperatura acqua calda Hot water temperature	55°÷65°C

Materiali - Materials

Rosoni e manopole: Acciaio Inox AISI 316L
Bocca vasca: Acciaio Inox AISI 316L
Doccia INB001: Acciaio Inox AISI 316 con diffusore in silicone, parti interne in acetalica
Flessibile: Maglia nylon nero con connessioni in ottone

Plates and handles: Stainless steel AISI 316L
Bathtub spout: Stainless steel AISI 316L
Handshower INB001: Stainless steel AISI 316 with silicone nozzles, internal parts in POM resin
Flexible Hose: Nylon sock with brass connections

Certificazioni - Certifications

Conformità - Conformity

Flexible hose: EN1113; Handshower: EN1112